



Product Specification

Ningbo East Electronics Limited
NO. 88 East Jinhui Road, Yinzhou Ningbo 315100, P.R.China
<http://www.east-mingtao.com>

| | |
|---------------|--------------|
| Product Name: | Piezo Buzzer |
| Part Number: | EFM-210D |
| Version: | 1.03 |
| Date: | 2019-11-5 |
| Note: | |


East is an ISO 9001 , IATF16949 and ISO 14001 Certified Company

Revision History

| Rev. | Description | Author/Date | Checked By | Approver |
|------|------------------------------------|------------------|------------|----------|
| 1.03 | Quality management system revised | 汤礼东 2019-11-5 | 吕文斌 | 王建成 |
| 1.02 | Carton Size changed | 汤礼东 2015-7-7 | 俞凯 | 王建成 |
| 1.01 | Quality Certificate Symbol revised | 吕文斌 2015-1-31 | 汤礼东 | 王建成 |

1. Part Number EFM-210D

2. Dimension Drawing (Unit: mm)

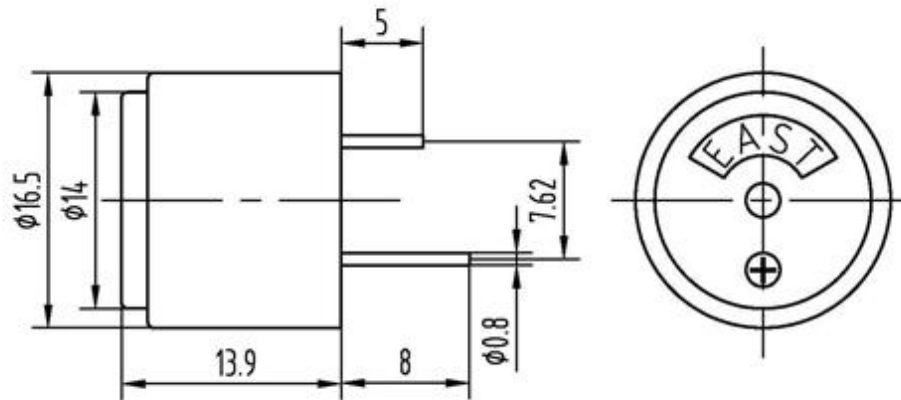


3. Specification

| No. | Item | Specification |
|------|---------------------------|-----------------------------|
| 3-1 | Min. Sound Pressure Level | 83dB/5V _{DC} /10cm |
| 3-2 | Rate Voltage | 5V _{DC} |
| 3-3 | Operating Voltage | 1~12V _{DC} |
| 3-4 | Max. Consumption | 15mA/5V _{DC} |
| 3-5 | Oscillating Frequency | 4.0± 0.5kHz |
| 3-6 | Tone Nature | Continuous |
| 3-7 | Operating Temperature | -20~+80°C |
| 3-8 | Storage Temperature | -20~+80°C |
| 3-9 | Case Material /Color | PC/Black |
| 3-10 | Weight | 2.2g |
| 3-11 | Pin Strength | More than 10N |

NOTES:

Test should be made under the conditions of room temperature (20±10°C), normal humidity (60±20%) and normal atmospheric pressure. In this case, however, that the judgment is questionable, the test conditions are to be changed to room temperature 20±2°C, relative humidity 60~70% and normal atmospheric pressure

4. Typical Frequency Response Curve

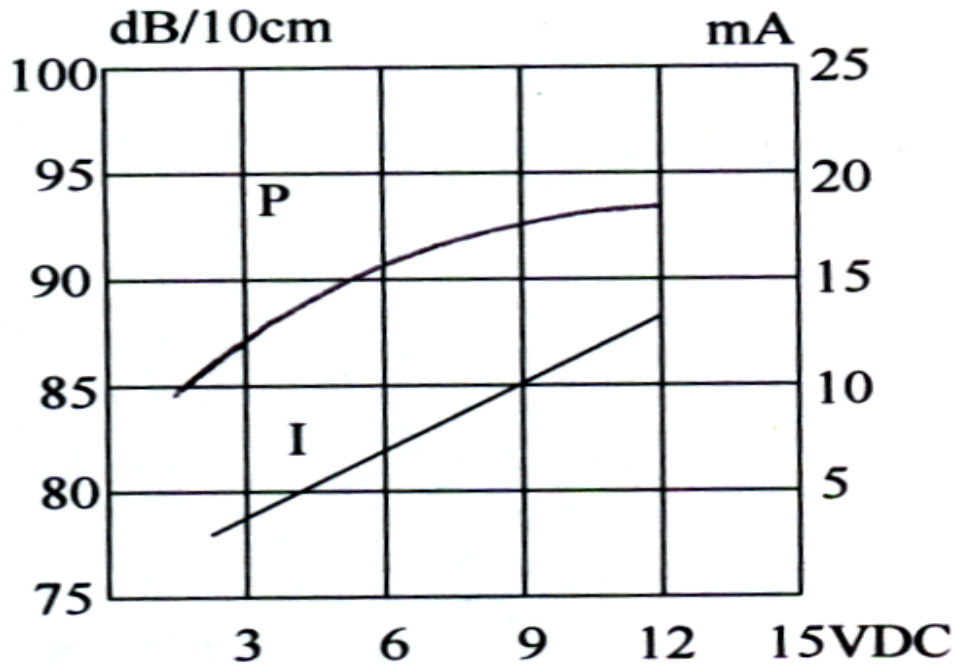

Note: Distance 10cm


5. Reliability Test

| No. | Item | Method of Test | Tolerance after Testing |
|-----|---------------------------------------|--|---|
| 5-1 | Operating Temperature | -20~+80°C | Sound pressure level initial value $\pm 10\text{dB}$ Max. consumption value $\pm 20\%$ Oscillating Frequency $\pm 20\%$ |
| 5-2 | Storage in high temperature | Storage in +80°C test box 96 hours then exposed to the room temperature for 2 hours | |
| 5-3 | Storage in low temperature | Storage in -20°C test box 96 hours then exposed to the room temperature for 2 hours | |
| 5-4 | Life test in the room temperature | Operate the product continuously 5 seconds on 5 seconds off 300 hours at rated voltage | |
| 5-5 | Temperature / humidity cycle test | Storage in +40°C, 93 \pm 3%RH test box 96 hours then exposed to the room temperature for 2 hours | |
| 5-6 | Temperature (high and low) cycle test | Conduct the test for 5 cycles without applying power then expose to the room temperature for 2 hours.(See Figure 5-6) | |
| 5-7 | Vibration test | Conduct the test for the directions of X Y and Z for 0.5 hour each (total 1.5 hours). To-and Fri sweep time(from 10 to 55Hz and then 55 to 10) under single amplitude of 0.75mm is 3 minute, then expose to the room temperature for 2 hours | |
| 5-8 | Drop test | Drop a product naturally from the height of 700mm onto the surface of 100mm thick wooden board. Two directions: upper and side of the product are to be applied for this drop test once respectively | |


| | | | |
|------|--------------------------------|---|--|
| 5-9 | Soldering heat resistance test | Dip the connecting pins in soldering at $260\pm 5^{\circ}\text{C}$ for 10 ± 1 seconds | |
| 5-10 | Test of soldering | Dip the connecting pins in soldering at $230\pm 5^{\circ}\text{C}$ for 3 ± 0.5 seconds | Solder shall be attached around over 95% of the dipped portion |

NOTE: The pins are allowed to deform after drop test.

Figure 5-6

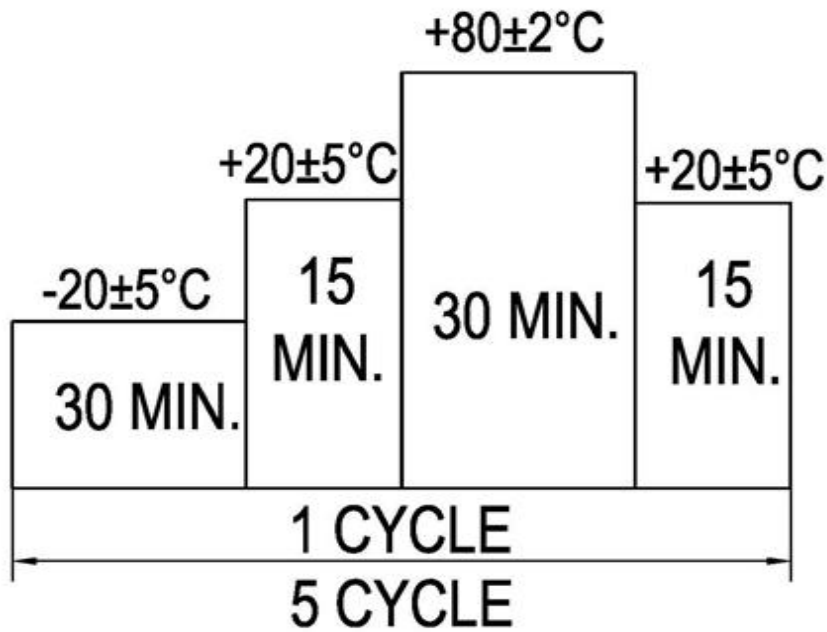

6. Electrical Testing Method

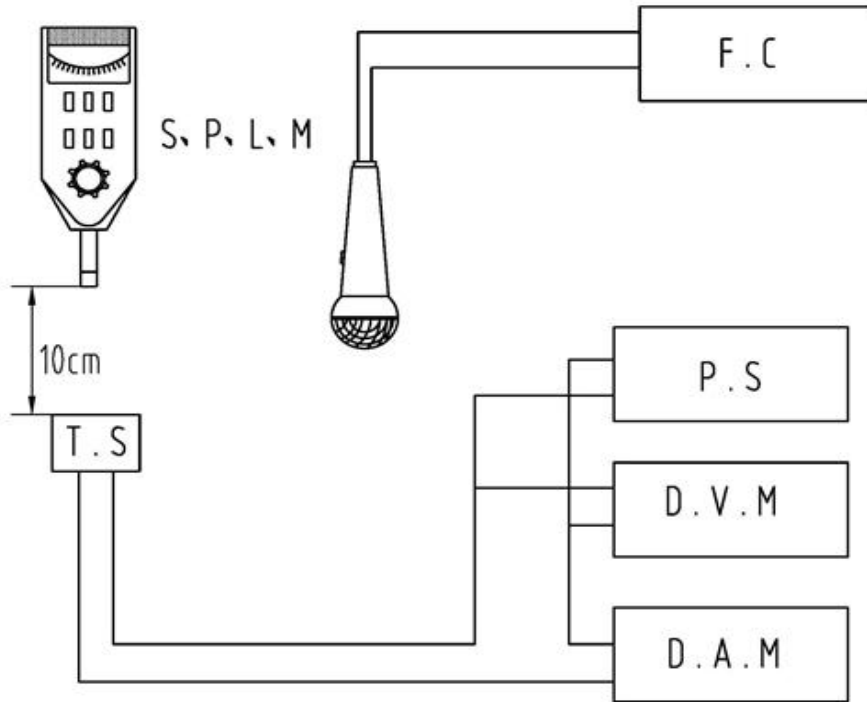

| | |
|---------|----------------------------|
| S.P.L.M | Sound Pressure Level Meter |
| T.S | Testing Sample |
| F.C | Frequency Counter |
| P.S | Power Supply |
| D.V.M | DC Voltage Meter |
| D.A.M | DC Ampere Meter |

7. Packing Information

Packing: 5000 pcs per export carton

Carton Size: 47× 30.5× 36 cm

G. Weight: 13.1 kgs N. Weight: 11.0 kgs